



OmniAccess Stellar Product Line Matrix

WLAN product & antenna comparison guide

	AP1572	AP1571	AP1561	AP1521	AP1511
WI-FI STANDARD	802.11be - Wi-Fi 7 Retro-compatible		802.11be - Wi-Fi 7 Retro-compatible	802.11be - Wi-Fi 7 Retro-compatible	802.11be - Wi-Fi 7 Retro-compatible
TYPE OF USE	Outdoor		Outdoor / Industrial	Indoor	Indoor
MAX THROUGHPUT	9,328 Gbps		9,328 Gbps	12.2 Gbps	9.328 Gbps
NB OF RADIOS	5 (incl. 1 for dedicated scanning & 1 BLE/Zigbee radio)		3 radios	5 (incl. 1 for dedicated scanning & 1 BLE/Zigbee radio)	4 (incl. 1 BLE/Zigbee radio)
SUPPORT BANDS	2.4GHz, 5GHz & 6GHz (1)		2.4GHz, 5GHz & 6GHz (1)	2.4GHz, 5GHz & 6GHz	2.4GHz, 5GHz & 6GHz
RADIO MIMO TYPE	x2 Downlink & uplink MU-MIMO simultaneous spatial streams		x2 Downlink & Uplink MU-MIMO simultaneous spatial streams	x8 Downlink & Uplink MU-MIMO simultaneous spatial streams	x2 Downlink & Uplink MU-MIMO simultaneous spatial streams
OFDMA / OFDM	OFDMA		OFDMA	OFDMA	OFDMA
MAX NB OF SSIDs (per AP)	48		48	48	48
MAX NB OF ASSOCIATED CLIENTS (per AP)	768		768	1280	768
MAX TRANSMIT POWER (per radio chain, MCSO, 2.4GHz/5GHz/6GHz)	26dBm / 26dBm / 27dBm		26dBm / 26dBm / 27dBm	25dBm / 29dBm / 27dBm	26dBm / 26dBm / 27dBm
INTEGRATED ANTENNAS	✗	✓ Omnidirectional	High Aperture Sector 90°x90° - Wall/Front deployment	✓ Omni	✓ Omni
ANTENNA PEAK GAIN (2.4 GHz / 5GHz / 6GHz)	Depends on external antenna	4.85dBi / 6.48dBi / 6.4dBi	4.85dBi / 6.48dBi / 6.4dBi	4.6dBi / 5.8dBi / 6.4dBi	5.6dBi / 5.9dBi / 6.4dBi
RF CONNECTORS (RF-SMA)	N-Type female	✗	✗	✗	✗
TPM MODULE 2.0	✓		✓	✓	✓
NETWORK INTERFACES	100M/1G/2.5G/5G/10G uplink		100M/1G/2.5G uplink	1 x 10GbE + 1 x 1GbE	1 x 5GbE
USB HOST INTERFACE	✓ USB 2.0 Type C		✗	✓ USB 2.0 Type C	✓ USB 2.0 Type C
BLE or ZIGBEE	BLE 5.1/Zigbee Integrated		✗	BLE 5.1/Zigbee Integrated	BLE 5.1/Zigbee Integrated
WAN RESILIENCY	✗		✗	✓	✗
PoE RESILIENCY/LOADSHARING	✗		✗	✗	✗
PoE POWERED	802.3bt/at (2)		802.3at	802.3at/bt	802.3at
PoE PSE	✓		✗	✗	✗
DC POWER SUPPORT	✓		Only PoE	✓	✓
OPERATING TEMP RANGE	-40°C to 65°C		-40°C to 65°C	0°C to 50°C	0°C to 50°C
ENCLOSURE VOLUME (excluding packing box & accessories)	243mm (W) x 243mm (D) x 85mm (H)		243mm (W) x 243mm (D) x 85mm (H)	210mm (W) x 210mm (D) x 43mm (H)	190mm (W) x 190mm (D) x 38mm (H)
WEIGHT (excluding packing box & accessories)	2500g		1700g	1020g	764g
RATING	IP67		IP67	UL2043 (plenum rated)	UL2043 (plenum rated)
DEEP PACKET INSPECTION	✓		✓	✓	✓
MAX POWER CONSUMPTION (excluding USB, PoE PSE)	50W		25W	40.2W	23.4W
SHIPPED WITH MOUNTING KIT	✗ To be ordered separately		✗ To be ordered separately	✗ To be ordered separately	✗ To be ordered separately

(1) 6GHz Radio is Software configurable and can operate at 5GHz in countries/zone where regulations do not allow operating 6GHz outdoors (like EU)
(2) Operating with IEEE 802.3at may disable some features to keep power consumption below the standard power of 802.3at.

Wi-Fi 7 Access Points

Wi-Fi 7 extends the features and capabilities of Wi-Fi 6/6E into the 6GHz band, in addition to the 2.5GHz and 5GHz bands and includes support for up to four super-wide 320 MHz channels.

This new Wi-Fi generation goes beyond using three bands to optimize spectral efficiency to increase more devices and users within the available frequency bands.

Moreover, Wi-Fi 7 improved reliability and performance to provide a more stable and robust wireless experience especially in dense areas of Wi-Fi devices.

	AP1451	AP1431	AP1411
WI-FI STANDARD	802.11ax - Wi-Fi 6E Retro-compatible	802.11ax - Wi-Fi 6E Retro-compatible	802.11ax - Wi-Fi 6E Retro-compatible
TYPE OF USE	Indoor	Indoor	Indoor
MAX THROUGHPUT	10 Gbps	4.2 Gbps	3.6 Gbps
NB OF RADIOS	5 (incl. 1 for dedicated scanning & 1 BLE/Zigbee radio)	4 (incl. 1 BLE/Zigbee radio)	3 (incl. 1 BLE/Zigbee radio)
SUPPORT BANDS	2.4GHz, 5GHz & 6GHz	2.4GHz, 5GHz & 6GHz	2.4GHz / 5GHz / 6GHz (configurable dual-band)
RADIO MIMO TYPE	x8 Downlink & Uplink MU-MIMO simultaneous spatial streams	x2 Downlink & Uplink MU-MIMO simultaneous spatial streams	x2 Downlink & Uplink MU-MIMO simultaneous spatial streams
OFDMA / OFDM	OFDMA	OFDMA	OFDMA
MAX NB OF SSIDs (per AP)	48	16 (limit to 4 on 6GHz)	32 (limit to 4 on 6GHz)
MAX NB OF ASSOCIATED CLIENTS (per AP)	1536	1536	1024
MAX TRANSMIT POWER (per radio chain, MCSO, 2.4GHz/5GHz)	24dBm / 27dBm / 22 dBm	25dBm / 25dBm / 25dBm	25dBm / 25dBm / 25dBm
INTEGRATED ANTENNAS	✓ Omni	✓ Omni	✓ Omni
ANTENNA PEAK GAIN (2.4 GHz / 5GHz)	3.9 dBi	4.5 dBi	4.5 dBi
RF CONNECTORS (RF-SMA)	✗	✗	✗
TPM MODULE 2.0	✓	✓	✓
NETWORK INTERFACES	2 x1 / 2.5 / 5 / 10GE	2x 1/2.5GE uplinks	1/2.5GE uplink + 1GE(IoT)
USB HOST INTERFACE	✓ USB 3.0 Type A	✓ USB 3.0 Type A	✓ USB 3.0 Type A
BLE or ZIGBEE	BLE 5.1/Zigbee Integrated	BLE 5.1/Zigbee Integrated	BLE 5.1/Zigbee Integrated
WAN RESILIENCY	✓	✓	✗
PoE RESILIENCY/LOADSHARING	Active / Active	Active / Active	✗
PoE POWERED	802.3bt	802.3bt	802.3bt/at
PoE PSE	✗	✗	✗
DC POWER SUPPORT	✓	✓	✓
OPERATING TEMP RANGE	0°C to 45°C	0°C to 45°C	0°C to 45°C
ENCLOSURE VOLUME (excluding packing box & accessories)	260mm (W) x 260mm (D) x 60mm (H)	180 mm (W) x 180 mm (D) x 36 mm (H)	180 mm (W) x 180 mm (D) x 36 mm (H)
WEIGHT (excluding packing box & accessories)	2370 g	985 g	985 g
RATING	UL2043 (plenum rated)	UL2043 (plenum rated)	UL2043 (plenum rated)
DEEP PACKET INSPECTION	✓	✓	✓
MAX POWER CONSUMPTION (excluding USB, PoE PSE)	49W	34W	25W
SHIPPED WITH MOUNTING KIT	✗ To be ordered separately	✗ To be ordered separately	✗ To be ordered separately

Wi-Fi 6E Indoor Access Points

Wi-Fi 6E extends the features and capabilities of Wi-Fi 6 into the 6GHz frequency band, in addition to the existing 2.4 GHz and 5GHz bands. It includes support for up to fourteen 80MHz channels or seven super-wide 160 MHz channels.


Using the 6GHz band means getting rid of the overhead and traffic from legacy devices, and in consequence, having better connectivity and less interference. What it all comes down to is the ability to support more bandwidth-intensive applications.





	AP1362	AP1361D	AP1361	AP1351	AP1331	AP1322	AP1321	AP1311	AP1301	AP1301H
WI-FI STANDARD	802.11ax - Wi-Fi 6 Retro-compatible			802.11ax - Wi-Fi 6 Retro-compatible	802.11ax - Wi-Fi 6 Retro-compatible	802.11ax - Wi-Fi 6 Retro-compatible	802.11ax - Wi-Fi 6 Retro-compatible	802.11ax - Wi-Fi 6 Retro-compatible	802.11ax - Wi-Fi 6 Retro-compatible	802.11ax - Wi-Fi 6 Retro-compatible
TYPE OF USE	Outdoor			Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Hospitality/Remote access
MAX THROUGHPUT	3 Gbps			10 Gbps	3.55 Gbps	3 Gbps	3 Gbps	1,77 Gbps	1,77 Gbps	1.77 Gbps
NB OF RADIOS	4 (incl. 1 for dedicated scanning & 1 BLE/Zigbee radio)			5 (incl. 1 for dedicated scanning & 1 BLE/Zigbee radio)	4 (incl. 1 for dedicated scanning & 1 BLE/Zigbee radio)	4 (incl. 1 for dedicated scanning & 1 BLE/Zigbee radio)	4 (incl. 1 for dedicated scanning & 1 BLE/Zigbee radio)	4 (incl. 1 for dedicated scanning & 1 BLE/Zigbee radio)	2	3 (incl. 1 BLE/Zigbee radio)
SUPPORT BANDS	2.4GHz & 5GHz			2.4GHz & 5GHz	2.4GHz & 5GHz	2.4GHz & 5GHz	2.4GHz & 5GHz	2.4GHz & 5GHz	2.4GHz & 5GHz	2.4GHz & 5GHz
RADIO MIMO TYPE	x4 Downlink & Uplink MU-MIMO simultaneous spatial streams			x8 Downlink & Uplink MU-MIMO simultaneous spatial streams	x4 Downlink & Uplink MU-MIMO simultaneous spatial streams	x4 Downlink & Uplink MU-MIMO simultaneous spatial streams	x4 Downlink & Uplink MU-MIMO simultaneous spatial streams	x2 Downlink & Uplink MU-MIMO simultaneous spatial streams	x2 Downlink & Uplink MU-MIMO simultaneous spatial streams	x2 Downlink & Uplink MU-MIMO simultaneous spatial streams
OFDMA / OFDM	OFDMA			OFDMA	OFDMA	OFDMA	OFDMA	OFDMA	OFDMA	OFDMA
MAX NB OF SSIDs (per AP)	32			24	32	32	32	16	16	32
MAX NB OF ASSOCIATED CLIENTS (per AP)	1024			1536	1024	1024	1024	512	512	1024
MAX TRANSMIT POWER (per radio chain, MCSO, 2.4GHz/5GHz/6GHz)	20dBm/20dBm			18dBm/18dBm	18dBm / 18dBm	18dBm / 18dBm	18dBm / 18dBm	18dBm / 18dBm	18dBm / 18dBm	18dBm / 18dBm
INTEGRATED ANTENNAS	✖	✔ Directional	✔ Omni	✔ Omni	✔ Omni	✖	✔ Omni	✔ Omni	✔ Omni	✔ Omni
ANTENNA PEAK GAIN (2.4 GHz / 5GHz)	ref. page 4	7.5/7.4 dBI	4.85/6.48 dBI	3.9/3.9 dBI	3.9dBi / 4.6dBi		3.61dBi/4.45dBi	3.3dBi / 3.3dBi	3.3dBi / 3.3dBi	3.92dBi / 4.41dBi
RF CONNECTORS (RF-SMA)	6 N-Type	✖		✖	✖	4 RP-SMA	✖	✖	✖	✖
TPM MODULE 2.0	✔			✔	✔	✔	✔	✔	✖	✖
NETWORK INTERFACES	2.5GE + 1 SFP port + 1GE (IoT)			2 x 1 / 2.5 / 5 / 10GE	2x5GE uplinks	1GE + 2.5GE	1GE + 2.5GE	2x1GE + 1GE (IoT)	2x1GE	1GE uplink + 4GE downlink + 1 pair RJ45 passthrough
USB HOST INTERFACE	✖	✔ USB 2.0 Type C		✔ USB 3.0 Type A	✔ USB 3.0 Type A	✔ USB 2.0 Type A	✔ USB 2.0 Type A	✔ USB 2.0 Type C	✔ USB 2.0 Type C	✔ USB 2.0 Type A
BLE or ZIGBEE	BLE 5.1/Zigbee Integrated			BLE 5.1/Zigbee Integrated	BLE 5.1/Zigbee Integrated	BLE 5.1/Zigbee Integrated	BLE 5.1/Zigbee Integrated	BLE 5.1 /Zigbee Integrated	☐	BLE 5.1 /Zigbee Integrated
WAN RESILIENCY	✖			✔	✔	✔	✔	✔	✔	✖
PoE RESILIENCY/LOADSHARING	✖			Active / Active	Active / Active	Active / Standby	Active / Standby	Active / Standby	Active / Standby	✖
PoE POWERED	802.3bt/at			802.3bt	802.3bt/at	802.3at (max 18W)	802.3at (max 18W)	802.3af/at	802.3af	802.3at/af
PoE PSE	15.4W/30W			✖	✖	✖	✖	✖	✖	✔ 802.3af
DC POWER SUPPORT	✖			48V DC (nominal)	48V DC (nominal)	48V DC	48V DC	48V DC (nominal)	48V DC (nominal)	48V DC (nominal)
OPERATING TEMP RANGE	-40°C to +65°C			0°C to 45°C	0°C to 45°C	0°C to 50°C	0°C to 50°C	0°C to 45°C	0°C to 45°C	0°C to 45°C
ENCLOSURE VOLUME (excluding packing box & accessories)	243mm (W) x 243mm (D) x 85mm (H)			260mm (W) x 260mm (D) x 60mm (H)	210mm (W) x 210mm (D) x 40mm (H)	180 mm (W) x 180 mm (D) x 36 mm (H)	180 mm (W) x 180 mm (D) x 36 mm (H)	180 mm (W) x 180 mm (D) x 36 mm (H)	180 mm (W) x 180 mm (D) x 36 mm (H)	86 mm (W) x 29 mm (D) x 162.5 mm (H)
WEIGHT (excluding packing box & accessories)	2230 g			1200 g	985g	700 g	700 g	582 g	574 g	320 g
RATING	IP67			UL2043 (plenum rated): Under testing	UL2043 (plenum rated)	UL2043 (plenum rated)	UL2043 (plenum rated)	UL2043 (plenum rated): Under testing	UL2043 (plenum rated)	✖ N/A
DEEP PACKET INSPECTION	✔			✔	✔	✔	✔	✔	✔	✔
MAX POWER CONSUMPTION (excluding USB, PoE PSE)	70 W			50 W	23 W	24.8 W	24.8 W	19.1 W	13.1 W	12.7 W
SHIPPED WITH MOUNTING KIT	✖ To be ordered separately			✖ To be ordered separately	✖ To be ordered separately	✖ To be ordered separately	✖ To be ordered separately	✖ To be ordered separately	✖ To be ordered separately	✔ Wall mounting kit

Wi-Fi 6 Access Points

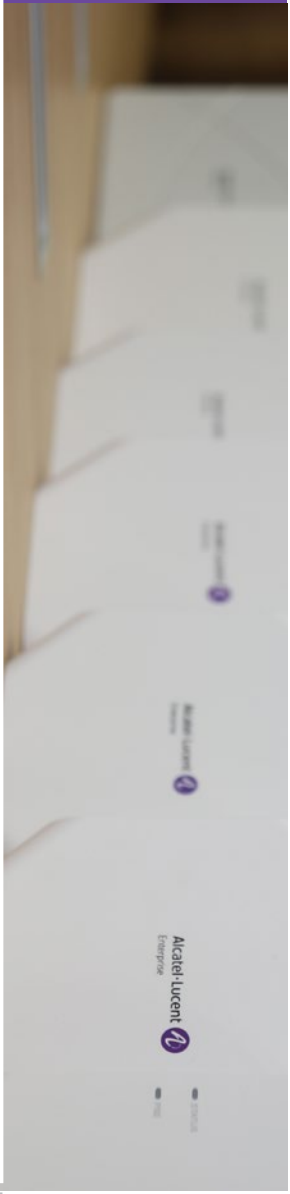



OmniAccess Stellar Access Point External Antennas Matrix

	Indoor	Indoor	Indoor	Indoor	Indoor	Outdoor	Outdoor	Outdoor	Outdoor
ANTENNA MODEL	ANT-O-6	ANT-O-M4-5	ANT-S-M4-60	ANT-S-M4-120	ANT-S-M4-30	ANT-O-M2-5	ANT-O-M4-9	ANT-S-M6-60-9	ANT-O-M6-8
CONFIGURATION	Omni Dual Band	Omni Dual Band	Sector Dual Band	Sector Dual Band	Sector 5GHz Band (37°)	Omni Dual Band	Omni Dual Band	Sector Dual Band (60°)	Omni Dual Band
GAIN	4dBi@2.4GHz 6dBi@5GHz	3.3dBi@2.4GHz 5.5dBi@5GHz	4.5dBi@2.4GHz 6dBi@5GHz	5dBi@2.4GHz 5dBi@5GHz	13dBi@5GHz	5dBi@2.4GHz 8dBi@5GHz	7.5dBi@2.4GHz, 9dBi@5GHz	9dBi±1dBi@2.4GHz, 9dBi±1dBi@5GHz	6dBi@2.4GHz, 8dBi@5GHz
3DB BEAM-WIDTH	H-Plane: 360°	H-Plane: 360°	H-Plane 60°, E-Plane 60°	H-Plane 120°, E-Plane 70°	H-Plane 37°, E-Plane 37°	Azimuth (Omni), Elavation (35°/25°)	Azimuth (Omni), Elavation (22°/11°)	H-Plane: 65±10°, V-Plane: 35±10°	H-Plane: 360°
POLARIZATION	Linear & Vertical	Linear, Vertical & Horizontal	Linear, Vertical & Horizontal	Double dual Slant ±45°	Vertical, Horizontal & Dual Slant (±45°)	Vertical & Horizontal	Vertical & Horizontal	Vertical & Horizontal	Linear, Vertical & Horizontal
CONNECTOR	RPSMA-J	RPSMA-J	RPSMA-J	RPSMA-J	RPSMA-J	2*N-Type Female	4*N-Type Female	6*N-Type Female	6*N-Type Female
CABLE	Direct attach	RPSMA-J+086	SMA-J/RPSMA-J+086	SMA-J/RPSMA-J	SMA-J/RPSMA-J				
OPERATING TEMPERATURE	-10°C to 60°C	-40°C to 70°C	-40°C to 70°C	-40°C to 70°C	-40°C to 65°C	-40°C to 65°C	-40°C to 65°C	-40°C to 65°C	-40°C to 65°C
WORKING WITH AP1222 	✔ Direct mount	✔ Typically used in indoor ceiling mount, Omni Wi-Fi coverage.	✔ Typically used in indoor wall mount, 60° directional Wi-Fi coverage.	✔ Typically used in indoor wall mount, 120° directional Wi-Fi coverage.	✔ Typically used in indoor wall mount, 30° directional high-gain coverage.	✘	✘	✘	✘
WORKING WITH AP1232 	✔ Direct mount	✔ Typically 1*AP1232+ 2*ANT-O-M4-5, used in indoor ceiling mount, Omni Wi-Fi coverage.	✔ Typically 1*AP1232+2*ANT-S-M4-60, used in indoor wall mount, 120° directional Wi-Fi coverage.	✔ Typically 1*AP1232+ 2*ANT-S-M4-120, used in indoor wall mount, 240° directional Wi-Fi coverage.	✔ Typically 1*AP1232+ 2*ANT-S-M4-30, used in indoor wall mount, 60° directional high-gain coverage.	✘	✘	✘	✘
WORKING WITH AP1322 	✔ Direct mount	✔ Typically used in indoor ceiling mount, Omni Wi-Fi coverage.	✔ Typically used in indoor wall mount, 60° directional Wi-Fi coverage.	✔ Typically used in indoor wall mount, 120° directional Wi-Fi coverage.	✔ Typically used in indoor wall mount, 30° directional high-gain coverage.	✘	✘	✘	✘
WORKING WITH AP1362 	✘	✘	✘	✘	✘	✔ AP1362 - 2.4GHz 2*2 MIMO Wi-Fi Coverage.	✔ AP1362 - 5GHz 4*4 MIMO Wi-Fi Coverage.	✔ AP1362 - 2.4GHz 2*2 MIMO + 5GHz 4*4 MIMO Wi-Fi Coverage.	✔ AP1362 - 2.4GHz 2*2 MIMO + 5GHz 4*4 MIMO Wi-Fi Coverage.

OmniAccess Stellar

Based on Alcatel-Lucent Enterprise distributed WLAN control architecture

Alcatel-Lucent Enterprise **OmniAccess Stellar products embed WLAN control in all access points** (APs) eliminating the need for physical centralised controllers.

ALE smart and advanced APs are managed as a single system or cluster, in a distributed and coordinated manner.

Distributed architecture from ALE delivers the best performance and scalability, and ensures high availability, with operational simplicity and low Total Cost of Ownership (TCO).



**Enterprise
grade Wi-Fi.
Operational
simplicity.**