
Manual to install the firmware

For DAP-X3060 Rev.A


Recommendation:
Connect the DAP-X3060 and the PC, with it you make the firmware upgrade, with a LAN cable with your network, there is also the DHCP server available.

For the installation of the firmware please follow this.

1. Get access to the setup of your DAP via web browser.
   The default address is http://192.168.0.50 or when you already implemented the DAP into your network please call the IP-address this you configured into you DAP or this the DAP got from the DHCP server in your network.



2. If the DAP-X3060 isn't already configured then at **System Country** choose any country and click on **Update**.

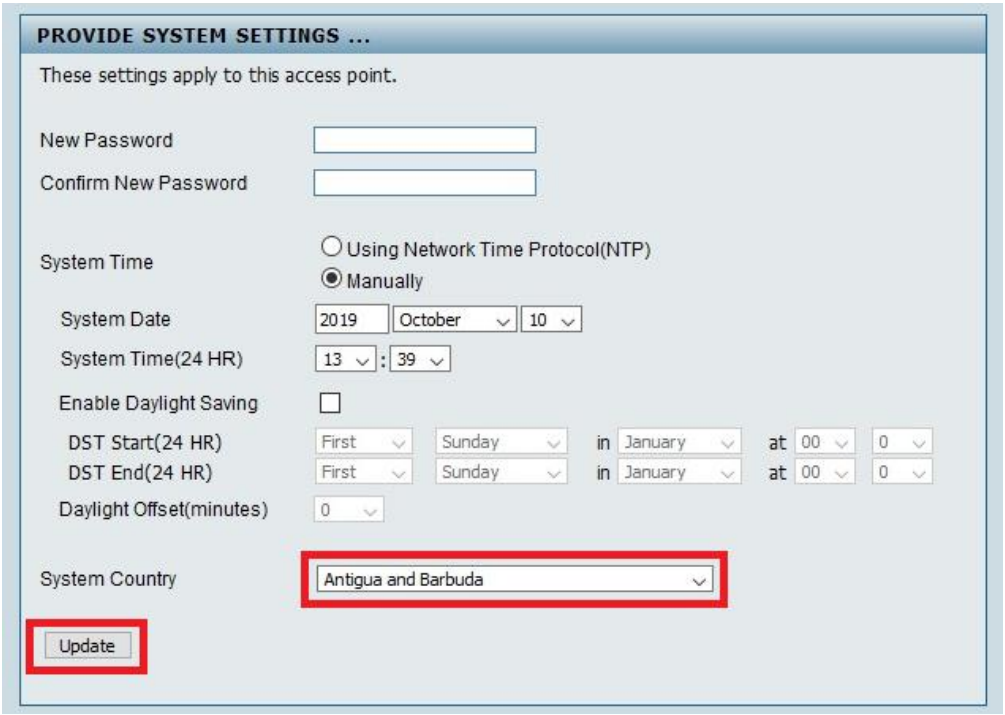


© 2023 D-Link (Deutschland) GmbH

3. Please wait 2 minutes.



4. By default the setup has the password **admin**.

   At **User name** and **Password** enter **admin** and then click on **Login**.

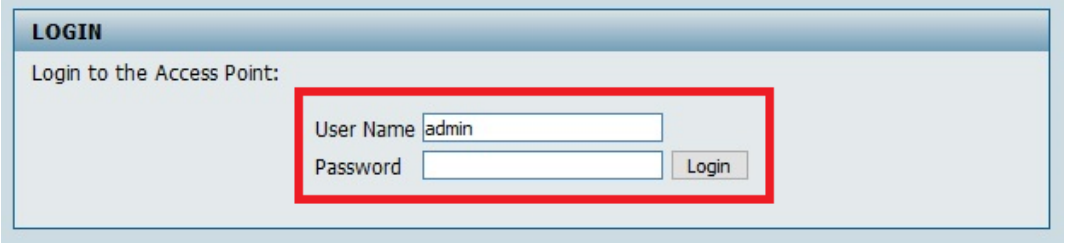


Note:
Did you set an Admin-Password please enter this.
Do you don't know the Admin-Password anymore you must reset the DAP-X3060 to factory defaults (Factory Reset).

For this press the Reset button of the running DAP-X3060 for example with a paperclip or pencil for 5-10 seconds.

© 2023 D-Link (Deutschland) GmbH

5. At the top choose the menu **Maintenance** and then in the open the menu **Firmware and SSL Certification Upload**.

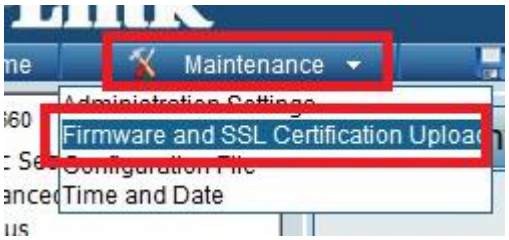

6. At **Upload Firmware From File** click on **Choose File**.

   Pick the previously un-zipped firmware file **DAP-X3060_RevA_Firmware_101r006.bin** and click on **Upload**.



7. The firmware will be installed now.

   This takes close to 5 minutes.



© 2023 D-Link (Deutschland) GmbH

8. **Important:**
   Reset the DAP-X3060 to factory defaults (Factory Reset).
   For this press the Reset button of the running DAP for example with a paperclip or pencil for 5-10 seconds.

   Else the DAP-X3060 can not be bound into a Nuclias Connect environment.
   If the DAP-X3060 already is running in a Nuclias Connect environment or running as a standalone access point then you don't need to make the factory reset.

To check the detailed version number of the installed version please log-in into the setup of your DAP-X3060.
In the address line of your web browser enter
http://<ip-adresse>/version.txt
The **<ip-adresse>** is for the IP-address of your DAP-X3060.
A page with detailed information about the firmware appears.

© 2023 D-Link (Deutschland) GmbH