Manual to install the firmware

For G403 Rev.A


For the manual installation of the firmware please follow these steps.

These instructions assume that you have already set up the G403 via the **Eagle Pro AI app** on your Android/iOS smartphone/tablet or via the web browser via the configuration interface.

1. Open a web browser (Edge, Firefox, Chrome...) and call the setup of the G403. The default address is http://192.168.0.1 or the **devicesetup.net** address this you can find on the label of the G403.

   If you have changed the IP-address at the first setup please call the G403 setup with this address.

   Enter the **Admin Password** and click on **Log In**.

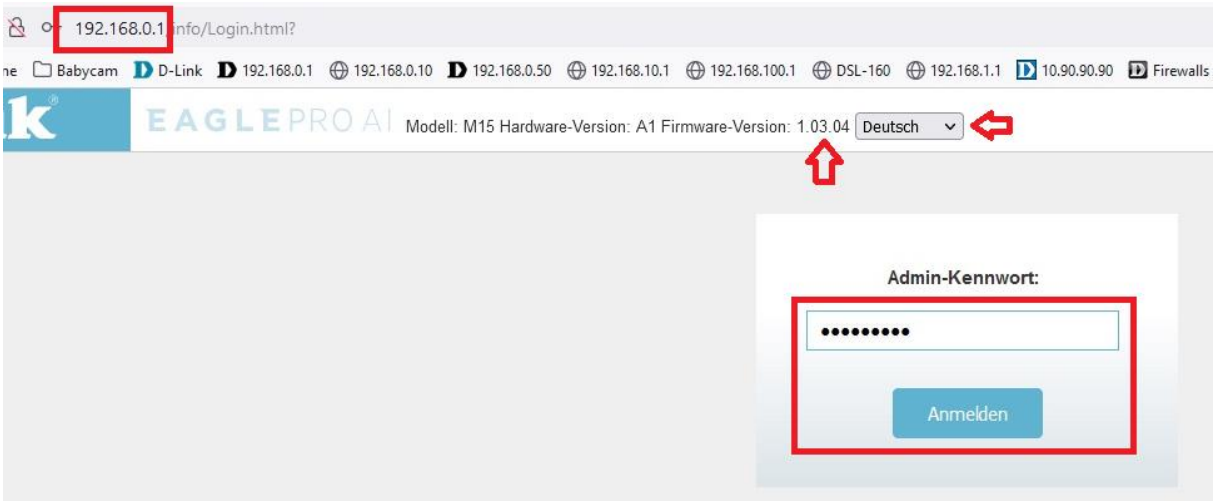

Notice:
If you don't know the Admin Password (anymore), then you have to reset the G403 to factory defaults and have to make a new setup via the **Eagle Pro AI app** on your Android/iOS smartphone/tablet or via the web browser via the configuration interface.

For the factory reset press and hold at first the Reset button of the G403 for 5-10 seconds.

© 2023 D-Link (Deutschland) GmbH

2. On the left choose the menu **Management** and the **Upgrade**.



3. Click on **Advanced Settings...** at **Device Name** G403 must be selected.

   Click on **Select File** and pick the already un-ZIP-ed firmware file **G403_RevA_Firmware_11001.bin** and click on **Upload**.



© 2023 D-Link (Deutschland) GmbH

4. Click on **OK**.





5. The firmware will be installed. This takes 2-3 minutes.

   Then click onto **OK**.





The firmware upgrade is finished.

© 2023 D-Link (Deutschland) GmbH